

PS-HQ29 IR Dome Camera



FEATUERS

- ◆ 1/3" SONY EX-view HAD II CCD (960H) Effio-A
- ◆ DSP: Sony Effio-E
- ◆ Resolution: Color 750TVL
- ◆ Min illumination: Color 0.03Lux/F1.2 , 0Lux/F1.2 (IR on)
- ◆ Motion detection, Privacy zones, BLC, HLC, CRR
- ◆ Electronic shutter adjustable, Mirror function, White Balance, ATR, NR (3D noise reduction)
- ◆ IR distance: 10-15m (IR leds:18xΦ5)
- ◆ OSD menu,,Lightning proof, 3D adjustable bracket, DC12V




High Resolution



HLC



Privacy Masking

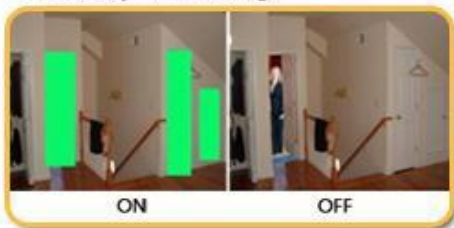

SPECIFICATION

Model	PS-HQ29
Pick-up device	1/3" SONY EX-view HAD II CCD (960H) Effio-A
Effective pixels	NTSC:976x494,PAL:976x582
Resolution	Color 750TVL
Min.illumination	Color 0.03Lux/F1.2, 0Lux/F1.2 (IR on)
Scan system	2:1 interlace
Sync system	Internal/Line lock
S/N ratio	more than 50dB
Lens	4-9mm Korean Manual Iris Lens
Electronic shutter	AUTO(1/60(1/50)~1/100,000)/FIXED/MANUAL
White balance	MANUAL/USER1/USER2/PUSH LOCK/CRR/ATW
NR(3D noise reduction)	Y/C,Y,C,OFF
Image adjustment	Lightness/Contrast/Sharpness/Tone/Saturation
ATR	OFF/ON
BLC	HLC/BLC/OFF
AGC	ON/OFF
Day&Night	Auto/B/W/Color
Privacy zones	Off/On(4 areas)
Motion detection	Off/On(4 areas)
Mirror function	Horizontal mirror/OFF
Gamma	0.45(Default)
OSD menu	7 kinds of language (English/Japanese/French/Spanish/German etc.)
Video output	1.0Vp-p Composite Video Output, 75 Ohm
IR distance	10-15 m(18xΦ5)
Power supply	DC12V± 10%
Power consumption(Max)	200mA/320mA(IR on)
Operation temp	-20°C ~ 50°C