

# PS-5808NI





### SPECIFICATION :

### FEATURES:

- 8CH 1080P/ 960P full real time network input NVR with 1U Case
- H.264 dual-stream compression
- Embedded Linux operation system
- Support synchronic video, playback, remote monitor, storage
- VGA/HDMI sync output, support 1080P HD preview
- Support 15 times electronic zoom preview and playback image •Support EXT alarm, bidirectional-talk
- Support DDNS,ONVIF, EMAIL,UPNP,NTP
- Support WEB, mobile viewer, Client, CMS
- App: goolink
- supported IP series6 , ONVIF

### DIMENSION :

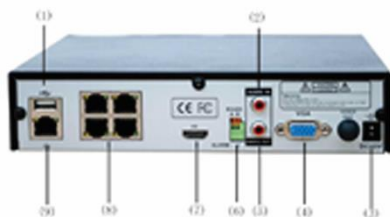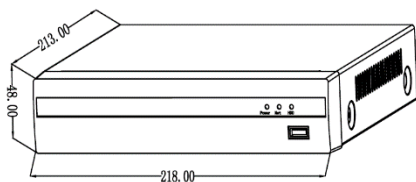

### INTERFACE:

- 1.USB2.0
- 2.RJ45
- 3.VGA Video output
- 4.HDMI Video output
- 5.RS485
- 6.DC 12V

Model	PS-5808NI
<b>VIDEO</b>	
Video Input	8CH 1080P/960P/720P
Video compression	H.264 (High Profile@Level4.2)
Video Output Resolution	1080p/960p/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF
Video Output	VGA/HDMI sync output, 1920*1080,1440*900,1280*1024,1366*768,1024*768,800*600
Bit Rate	16-8000Kbps
Image Display	1/4/9
Snapshot	Support(BMP)
Motion Detection	396(22*18) surveyed area can be set in every screen and multi sensitivity adjustable (Need IPC Support)
<b>AUDIO</b>	
Audio Encoding	G.711A
Audio Input	IPC Complex audio input
Audio Output	1CH, BNC port
Talkback	bidirectional-talk, BNC port
<b>VIDEO RECORDING AND PLAYBACK</b>	
Video Frame Rate	1-30fps
Record Mode	Manual/Alarm/MD/Regular
Playback Synchronic	1 CH 1080P /960P; 4 CH 720P
Search Method	Time, Calendar, Event, Channel
Video Playback	Start, Stop, Fast play, Slow play, Frame play, Snapshot, Full screen, Roller amplification time ball precise playback
<b>VIDEO BACKUP</b>	
Interface	1 SATA
HDD Capacity	4TB
Backup location	Local HDD, Network
Backup Method	Network, USB storage device, USB recorder
<b>NETWORK MANAGEMENT</b>	
Protocol	TCP/IP,HTTP,DDNS,SMTP,DHCP,PPPOE,UPNP,NTP,ONVIF,P2P
<b>EXT INTERFACE</b>	
Network Interface	RJ45 10M/100M adaptive Ethernet port
RJ45 Port	1 RJ45
Alarm port	NO
RS-485	1 RS485, support PS-KT301 keyboard
USB Port	2 USB2.0, support WIFI/3G Extensions
<b>GENERAL</b>	
Operation Temp And humidity	-10°C ~ 55°C/10% -90%
Power supply	DC12V/3A (Power plug can be select)
Power Consumption	5W (Without HDD)
Unit Dimension(mm)	L 218*W 213*H 48
Weight	1 Kg