




Key Features

- HDCVI BNC interface, Support Over 500m via 75Ω coaxial cable
- long distance real-time transmission
- High definition video /Audio /RS485 transmission
- Support Day/Night (ICR)
- 3D-DNR and superior performance of low illumination
- 50M (4 Array IR LED)
- Blower

Dimension

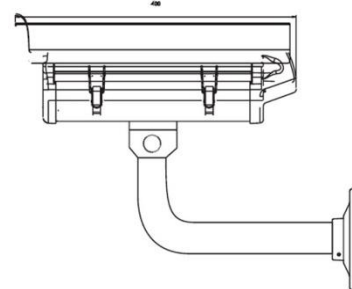

SPECIFICATION

Parameter	Model	PS-Z32CVI
		1 / 2.9" 1.0M(1280*720PX/1280*960PX) CMOS sensor
Camera		
CPU		high-performance ISP
Image Sensor		1 / 2.9" CMOS
Resolution		1280(H)* 720(V)
Lens		2.8-12mm
Day/Night		Auto(ICR)
Auto Iris		Auto Iris (DC)
Min. Illumination		Color: 0. 1Lux/F1.2, B/W: 0.001Lux/F1.2(IR on)
White Balance		Auto/Manual
Exposure mode		Manual / Auto /AP / SP(1~1/10000)
Video Standard		HDCVI port,HD output
Control way		video /Audio /RS485 via coaxial cable
AUDIO/VIDEO COMPRESSION		
Frame Rate		PAL: 1280*720@25fps/ NTSC: 1280*720@30fps
Image flip		Support mirror
Function		
Image Settings		Brightness, Contrast, Saturation, Sharpness, etc can be adjusted via OSD
3D-DNR		ON/OFF via OSD
Motion Detection		Yes via OSD
Video output		1CH BNC
Menu		YES
Communication Port		1ch RS485 port, support PELCO-D/P, Dahua protocol
Others		
Power supply		DC12V
Power consumption		7W MAX(ICR on, 8.5W MAX)
Working Environment		-10°C~+55°C, 10%~90%
Dimensions(W/D/H)		175×152×400 mm
Weight		1100g
Installation		Wall Mount